

Wall Mount Central Lighting Inverter

With true Sine Wave output, the Crucial Power Products Lite-Wave has been specifically designed for smaller emergency lighting loads (200 – 490 watts) common with today's new lighting specifications. The Lite-Wave is perfect for LED lighting, as well as HID, HPS, Fluorescent, and Incandescent. With the required 90 minutes of power on tap, this compact, state-of-the-art unit is designed with no compromise to safety and efficiency. It is economical to own, and economical to operate.

Loaded with more standard features than the competition, the Lite-Wave is self-contained, with both inverter and batteries housed in a single cabinet. Available in 120 volt input /output, and 277 volt input /output, the Lite-Wave comes standard with function indicators, main input/output breaker, battery breaker, and LCD monitor screen. Options include TVSS, additional output circuit breakers, seismic floor mounting brackets, SNMP card, RS 232, USB port and a Remote Status Panel.

KEY FEATURES

- Pure Sine Wave Output preferred for LED Lighting Loads
- Automatic monthly and annual self testing
- Compact 24"W x 17"H x 9.5"D space-saving enclosure with front access
- Double Conversion, "no break" online system for all applications and lamp types
- Bright function indicators for rapid identification of system status
- Enhanced protection utilizing latest TVSS technology
- 1 Year Warranty
- Optional RS-232 and USB comm port with monitoring software
- Optional SNMP/Web card



Lite-Wave



Pure Sine Wave Output

200, 300, or 490 Watts
Single Phase, 120 or 277 Volt
Incandescent, Fluorescent, LED, HID

Very Small and Front Access
Listed to UL924 by ETL

A Full Line Power Protection Company.

Lite-Wave Specifications

Sizes: 200, 300, and 490 Watts
Input Voltage: 120 or 277 Volt $\pm 10\%$ On-Line zero Transfer time
Output Voltage: 120 or 277 Volt
Output Frequency: 50 or 60 Hz. $\pm 5\%$ (battery mode)
Output Voltage Reg.: $\pm 4\%$ for all loads and for Battery Discharge mode
Output Wave Form: Sine Wave, THD < 3% at linear load
Output Protection: Current limiting and short circuit protection
Battery: Maintenance free sealed lead acid
Recharge Time: Recharge Time per U.L. 924
Safety Agencies: UL924, NFPA101, NFPA70, NEC, and OSHA
Indicator: LCD: UPS Status
LED: Green: UPS ON, Output available,
 Orange: Battery mode, Bypass mode, Red: Fault
Audible Alarms: Battery Mode, Overload, Fault

Environmental:

Humidity: 0 - 95% non-condensation
 Operating Temp.: UPS: 0°C to +40°C. (32°F to 104°F)
 BATTERY: 20°C to 25°C. (68°F to 77°F)


Physical Dimension: 24" Wide x 17" High x 9.5" Deep

TOTAL WATTS	Model Numbers	Total Weights (lbs)	INPUT	OUTPUT	*BTUs/HR
200	WM.20A01CP	132	120V	120V	216
	WM.20R01CP	136	277V	120V	233
	WM.20R25CP	139	277V	277V	233
	WM.20A25CP	136	120V	277V	233
300	WM.30A01CP	132	120V	120V	305
	WM.30R01CP	136	277V	120V	353
	WM.30R25CP	139	277V	277V	353
	WM.30A25CP	136	120V	277V	353
490	WM.49A01CP	244	120V	120V	499
	WM.49R01CP	248	277V	120V	543
	WM.49R25CP	251	277V	277V	543
	WM.49A25CP	248	120V	277V	543

* BTU/HR are approx. number with tolerance $\pm 15\%$ for all models

Applications

- Office Buildings, Factories
- Hospitals, Hotels & Motels
- Schools & Universities
- Shopping Centers
- Casinos, Airports
- Military Installations
- Apartment Buildings
- Train & Bus Terminals

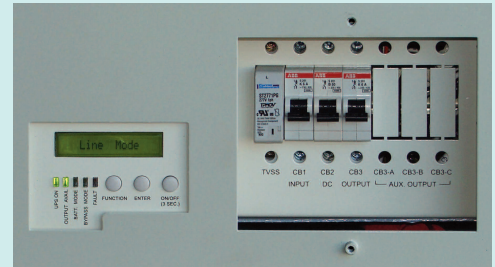

STANDARD FEATURES

- Low Profile Compact Cabinet (24" x 17" x 9.5")
- Single Phase, Full Range Voltage Regulation
- LCD Display for easy viewing UPS status
- 5 LED Lights: UPS On, Output Avail, Batt Mode, Bypass Mode, Fault
- Audible Alarms
- Main Input/Output Breaker
- Battery Breaker
- Double Conversion, "no break" online system for all applications and lamp types
- Wall Mount Brackets

Ordering Guide

System	Power (Watts)	Input Voltage	Output Voltage
WM	.20 = 200 Watts	A = 120 Volts	01 = 120 Volts
	.30 = 300 Watts	R = 277 Volts	25 = 277 Volts
	.49 = 490 Watts		

WM.20A01CP - TVSA - 2BRK - FLR

Model Number TVSS Option Output Breaker Option Mounting Option

Model Number + TVSS + 2 Output Circuit Breaker + Floor Mounting

Options

TVSS (120V Input) = TVSA
 TVSS (277V Input) = TVSR
 Output Breakers (1) 10 amp = 1BRK
 Output Breakers (2) 10 amp = 2BRK
 Output Breakers (3) 10 amp = 3BRK
 Normally Off Output Circuit Breakers
 SNMP = SNMP
 RS 232 = 232
 Floor Mount = FLR
 Remote Status = RST

Specifications are subject to change without prior notification

6005-205C Rev A. 0315

© Copyright Crucial Power Products All rights reserved.

CP CRUCIAL POWER PRODUCTS

14000 S. Broadway, Los Angeles, CA 90061
 Tel: (800) 244-4069 • Fax: (800) 246-2346

www.crucialpower.com
 email: info@crucialpower.com